




### Symbol



### Specifications



Model	K23R7-L6	K25R7-L6	K23R7-L8	K25R7-L8
Nominal diameter	6mm		8mm	
Working medium	Air(to be filtered by 40 μm filter element)			
Mpa Working pressure range	0.05~0.8MPa			
Fuild temperature °C	-10~55			
Ambient temperature °C	-5~50			
Net sectional area	10mm <sup>2</sup>		20mm <sup>2</sup>	
Leakage rate	≦50cm <sup>3</sup> /min			
Operating force	≦80N		≦100N	
Service life(Million times)	≧200			

### Ordering code

<b>K</b>	<b>23</b>	<b>R7</b>	<b>L</b>	<b>6</b>
<b>Model</b>	<b>Position number</b>	<b>Control mode</b>	<b>Connection type</b>	<b>Nominal Diameter</b>
K Foot Pedal Valve (3/2 Way, 5/2 Way)	23 3/2 Way 25 5/2 Way	R7 Foot pedal valve	L Orifice Size	6 6mm 8 8mm

### Dimensions

#### K23R7-L□

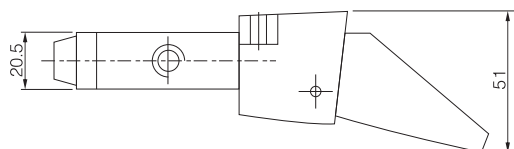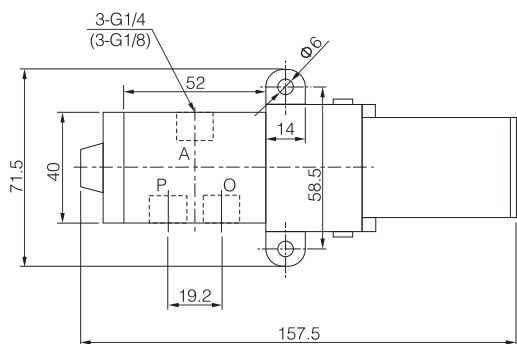

#### K25R7-L□

